


IDP-ZONE-6

Six Zone Interface Module

The IDP-ZONE-6 is an addressable zone interface module for use with the Honeywell Farenhyt Series fire alarm control panels (FACPs). The IDP-ZONE-6 provides six zone inputs that allow a Farenhyt FACP to interface and monitor two-wire conventional smoke detectors. This means you can retrofit an existing building and use existing conventional devices.

The inputs on the IDP-ZONE-6 share a common FACP signaling line circuit (SLC) input, and the initiating device circuits share a common external power supply. Otherwise, each input on the module operates independently from the others. If needed, you can disable a maximum of two unused inputs on the IDP-ZONE-6 board.

It transmits the status of a zone of two-wire detectors to the FACP. Status conditions are reported as normal, open, or alarm. The IDP-ZONE-6 supervises the zone of detectors and the connection of the external power supply. All two-wire detectors being monitored must be UL compatible with the IDP-ZONE-6.

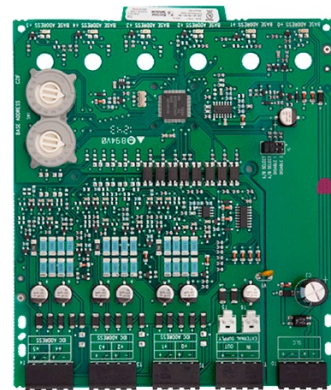

IDP-ZONE-6

INSTALLATION

The IDP-Zone-6 mounts in the IDP-ACB cabinet. The IDP-ACB has a built-in chassis that will accommodate one or two IDP Zone-6 modules.

FEATURES & BENEFITS

- Converts a conventional two-wire loop to an SLC loop
- Six zone inputs
- Fully supervised
- Support for Class B and Class A wiring
- Removable 12 to 18 AWG plug-in terminal blocks
- Individual LED for each relay contact
- Two module mounting in the IDP-ACB cabinet
- Up to two unused modules can be disabled
- Rotary address switches for fast installation
- Mounting hardware included
- UL Listed
- CSFM Listed
- MEA Listed 386-02-E Vol. II

IDP-ZONE-6 Technical Specifications

SPECIFICATIONS

Physical: 6.8" H x 5.8"W x 1.25" D

Shipping Weight: 6.3oz (196g)

ELECTRICAL RATINGS

Operating Voltage: 15 to 32VDC

Standby Current: 2mA

Alarm Current: 40mA max. (Assumes all six LEDs solid on)

Initiating Device Circuit: Supervised, power-limited

Max. IDC Wiring Resistance: 25Ω max

External Power Supply

Standby Current: 50mA

Alarm Current: 270mA

End-of-Line Resistance: 3.9k Ω

ENVIRONMENTAL

Operating Temperature: 32°-120°F (0°C – 49°C)

Humidity: 10 to 93% non-condensing)

ORDERING INFORMATION

IDP-ZONE-6: Six Zone Two-Wire Interface Module

ACCESSORIES

IDP-ACB: Module Cabinet. Cabinet holds two IDP-ZONE-6. 15.25" H x 12.5" W x 3"D

COMPATIBILITY

The IDP-ZONE-6 is compatible with the following Farenhyt Series FACPs:

- IFP-2100 / IFP-2100ECS / RFP-2100
- IFP-2000 / IFP-2000ECS / RPS-2000
- IFP-1000 / IFP-1000ECS
- IFP-300 / IFP-300ECS
- IFP-100 / IFP-100ECS
- IFP-75
- IFP-50

For a list of detectors compatible with the IDP-Zone-6, see the IDP-Zone-6 Installation Instructions. (PN I56-2733-00).

For a complete listing of all compliance approvals and certifications, please visit www.farenhyt.com.

Microsoft, Windows, and the Windows Logo are registered trademarks or trademarks of Microsoft Corporation.

Honeywell® and System Sensor® are registered trademarks of and Farenhyt™ is a trademark of Honeywell International, Inc.

This document is not intended to be used for installation purposes. We try to keep our product information up-to-date and accurate. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice.

For Technical Support, Please call 800-446-6444.

For more information

Learn more about Honeywell's Farenhyt Series and other products available by visiting www.farenhyt.com

Honeywell Security & Fire

12 Clintonville Road
Northford, CT 06472
800-328-0103

Doc 350297 | Rev G | 09/17
© 2017 Honeywell International Inc.

Honeywell
THE POWER OF **CONNECTED**