

ECS-RPU

Remote Paging Unit

The ECS-RPU is a remote paging unit that provides a supervised microphone, 8 emergency message buttons, and 16 mappable audio switches. With dimensions of 17³/₄" x 11⁷/₁₆" x 3¹/₂", this lower profile remote paging unit is ideal for locations where the standard LOC won't fit.

The RA-2000 and RA-100 have the same height and flush mount depth as the ECS-RPU so if your installation requires a fully functioning LOC with annunciation the RA-2000 or RA-100 can be installed right next to the ECS-RPU for a sleek installation.

The IFP-100ECS, IFP-300ECS and IFP-1000ECS can support a maximum of 7 ECS-RPUs or ECS-LOCs in any combination.

The IFP-2000ECS, IFP-2100ECS or IFP-2100ECSB can support a maximum of 15 ECS-LOCs or ECS-LOC2100s in any combination.

INSTALLATION

The ECS-RPU can be surface or flush mounted.


COMPATIBILITY

The ECS-RPU is compatible with the following ECS FACP's:

- IFP-2100ECS (max 15 per system)
- IFP-2100ECSB (max 15 per system)
- IFP-2000ECS (max 15 per system)
- IFP-1000ECS (max 7 per system)
- IFP-300ECS (max 7 per system)
- IFP-100ECS (max 7 per system)


FEATURES & BENEFITS

- Smaller footprint than the ECS-LOC
- Supervised Microphone
- Connects to control panel via 4-wire SBUS and 2-wire VBUS
- Eight emergency communication message buttons
- 6 mappable audio switches

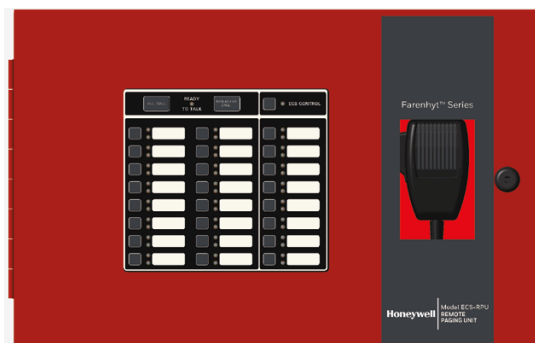

ECS-RPU

ECS-RPU Technical Specifications

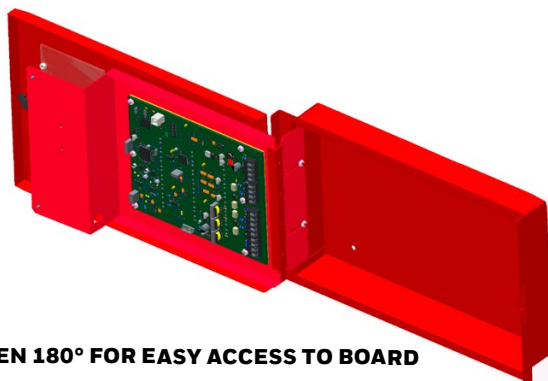

ECS-RPU OPEN 180° FOR EASY ACCESS TO BOARD



ECS-RPU SHOWN WITH AN RA-2000

For a complete listing of all compliance approvals and certifications, please visit www.farenhyt.com.

Microsoft, Windows, and the Windows Logo are registered trademarks or trademarks of Microsoft Corporation.

Honeywell® is a registered trademark of and Farenhyt™ is a trademark of Honeywell International, Inc.

This document is not intended to be used for installation purposes. We try to keep our product information up-to-date and accurate. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice.

For Technical Support, Please call 800-446-6444.

PHYSICAL

Flush Mount Dimensions: 16 3/8" W x 10" (41.6 W x 25.4 cm)

Overall Dimensions: 17.739" W x 11.372" H x 3.329" D (45.057 W x 28.885 H x 8.4557 D cm)

Color: Red

ENVIRONMENTAL

Operating Temperature: 32°F to 120°F (0°C to 49°C)

Humidity: 0 to 93% relative humidity (non condensing)

ELECTRICAL:

Standby Current: 70mA

Alarm Current: 100mA

ORDERING INFORMATION

ECS-RPU: Remote Paging Unit

ACCESSORIES

THUMBLTCH: Turn latch lock

RA-100: Remote Annunciator (used with IFP-100ECS and IFP-1000ECS)

RA-2000: Remote Annunciator (used with IFP-300ECS, IFP-2000ECS, and IFP-2100ECS)

APPROVALS

NFPA 13, NFPA 15, NFPA 16, NFPA 70, & NFPA 72: Central Station; Remote Signalling; Local Protective Signalling Systems; Auxiliary Protected Premises Unit; Water Deluge Releasing Service.

UL Listed

CSFM: 7165-0559:0505

FDNY COA: (pending);

Seismic (CA): (pending),

FM approved

For more information

Learn more about Honeywell's Farenhyt Series and other products available by visiting www.farenhyt.com

Honeywell Security & Fire

12 Clintonville Road
Northford, CT 06472
800-328-0103

351185 | DI 11/17
© 2017 Honeywell International Inc.

Honeywell